




High rate package sortation up to 150 cartons per minute may be accurately and gently sorted using Roach model FS150, flite sortation conveyor.

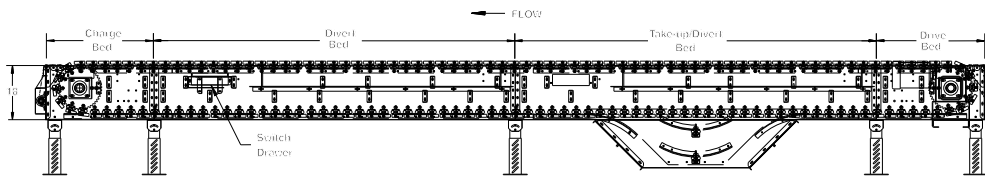

SPECIFICATIONS

ROLLERS: Densely located to carry various size unit loads/weights.

FRAME: Heavily constructed 12 ga. for long lasting operation.

DIVERT SHOES: Guided by UHMW wearstrip for smooth, quiet operation.

RATE: 150 cartons/min. maximum.

DRIVE: 1 HP, 230/460/3, 60 cycle, ODP right angle gear motor.


SPEED: Varies with desired rate of flow.

FLOOR SUPPORTS: 31"-40" TOR.
Supports provided at both ends and each bed joint.

ELECTRICAL CONTROLS: Custom designed for specific application. Consult factory.

PACKAGE SIZE: Minimum length 9"; maximum length 48". Minimum width 1"; maximum width 36".

PACKAGE WEIGHT: Preferred package weight range is 2 to 100 lbs.

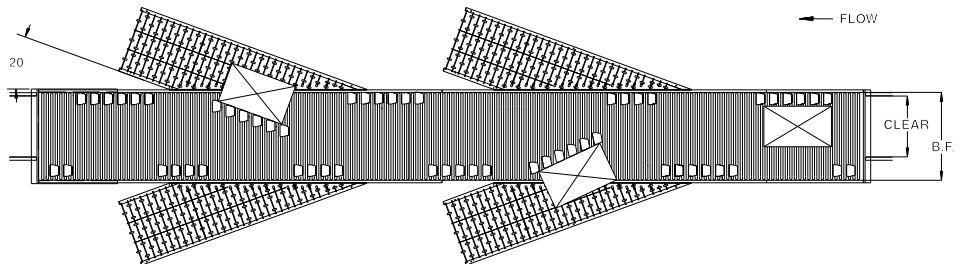

■ 12 week shipment