
MODEL RVC / CVC VERTICAL CONVEYORS

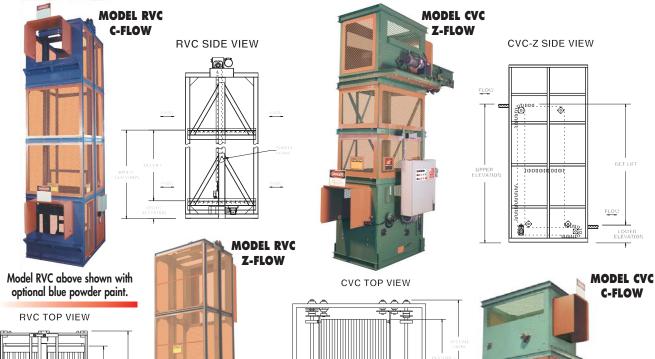

RVC SPECIFICATIONS

CAPACITY: Up to 3000 lbs.

FRAME: Heavy duty tubular construction.

DRIVE: (2) heavy strands of chain to raise and lower carrier platform.

RATE: Varies with unit height.

SPEED: 60 FPM (120 FPM maximum).

LOADING: One or more loading points

may be selected at any level.

PLATFORM: Specify conveyor type. **GUARDS:** Expanded metal guarding.

CONTROLS: Optional.

CVC NO.	Carrier Platform Dime Length	NSIONS WIDTH	PLATFORM CAPACITY
60	3" INCR. UP TO 49-1/2"	18" - 60"	200
80	4" INCR. UP TO 78"		600
100	5" INCR. UP TO 92-1/2"	30" - 96"	1000
122	6" INCR. UP TO 105"	36" - 96"	2000
143	8" INCR. UP TO 108"	36" - 96"	3000

CVC SPECIFICATIONS

CAPACITY: Up to 3000 lbs.

FRAME: Heavy duty tubular construction.

DRIVE: (4) continuous roller chains driven by a suitably sized brake motor.

RATE: Up to 25 loads per minute.

SPEED: 60 FPM (100 FPM maximum).

LOADING: Automatic loading is accomplished by metering belt. Operator

attention is not required.

PLATFORM: Size depends upon product.

GUARDS: Expanded metal guarding.

CONTROLS: Supplied as required.



CVC-C SIDE VIEW

